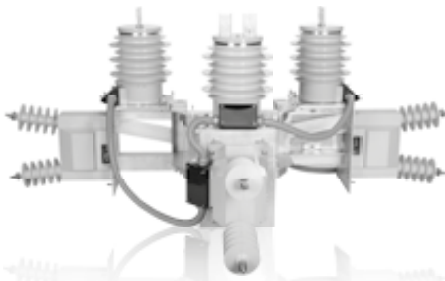


ME-025

25 kV METERING UNIT



ARTECHE ME/MK series metering units are outdoor, three-phase, pole-mounted metering racks.

The rack is made of lightweight aluminium designed to mount on poles in an upright position. It includes two galvanized steel mounting bolts for attaching the metering unit to the pole, with pole diameters available from 8" to 14". Optional galvanized steel structures and/or other pole diameters are available upon request.


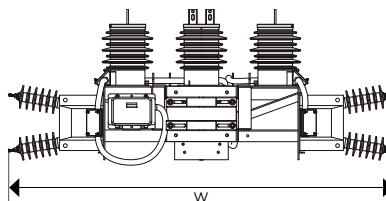
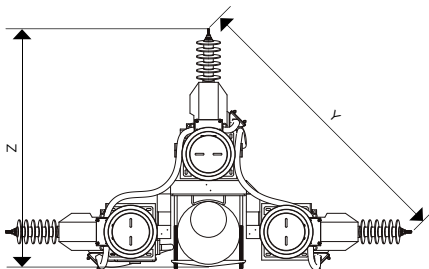
ME series incorporate 3 current transformers mounted vertically and 3 voltage transformers mounted horizontally. Their core is encapsulated with Type B epoxy resin which provides excellent internal dielectric properties and mechanical strength. The external layer of Cycloaliphatic Epoxy Resin (CEP) provides resistance to ultraviolet rays and the effects of tracking and erosion on the exterior of the transformer ensuring a long mechanical and electrical life. The transformer is maintenance free.

The external layer can be manufactured with Hydrophobic Cycloaliphatic Epoxy Resin (HCEP) which improves service life expectancy due to its improved tracking and erosion resistance. HCEP additionally increases the transformer's weatherability and offers better performance in heavily polluted environments.





The core is built with high permeability grain oriented silicon steel laminations for low losses. The windings are copper wire with copper plate double isolation. The concentric distribution of the coils prevents magnetic flux leakage, achieving greater accuracy and higher capacity to withstand mechanical stresses in adverse operating conditions.

Partial Discharge measurements exceed the IEEE, CAN/CSA and IEC requirements.

OUTDOOR
60 Hertz



Drawing number: 4287228

	PRIMARY TERMINAL CT	PRIMARY TERMINAL VT	GROUND CONNECTOR	SECONDARY TERMINAL
CONNECTIONS				
	Type: NEMA-2 Material: Copper	Type: TE-4T Material: Copper Range: 8SOL-4TRE	Type: TE-12-250 Material: Copper Range: 4TRE-250MCM	Type: Quick Connector Material: Brass

